

D550 Curve LED downlight

Datasheet




Product codes


Unit: D550	Series: CR	Colour temp.: 2.7K 3K 4K 5K	Beam angle (°): 36	Colour: S (Silver) W (White)
----------------------	----------------------	------------------------------------------------	------------------------------	-------------------------------------------

Photometrics

Standard Products

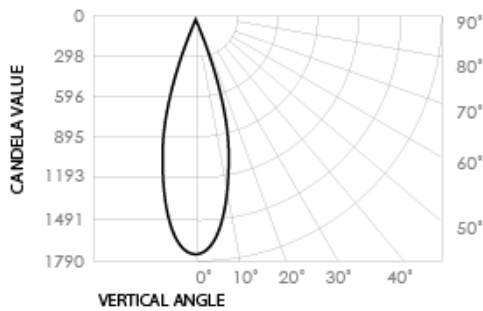


Source lumen output: 590lm
Delivered lumen: 550lm
Efficacy: 73lm/W
Colour temp.: 3000K
Beam angle: 36°
CRI: 97
Standard Deviation of colour matching (SDCM): 2MacAdams Steps

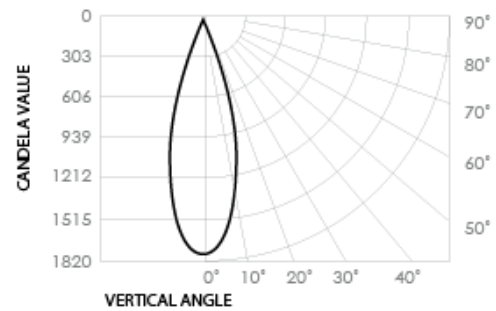


Source lumen output: 605lm
Delivered lumen: 560lm
Efficacy: 75lm/W
Colour temp.: 4000K
Beam angle: 36°
CRI: 97
Standard Deviation of colour matching (SDCM): 2MacAdams Steps

Special Order Products

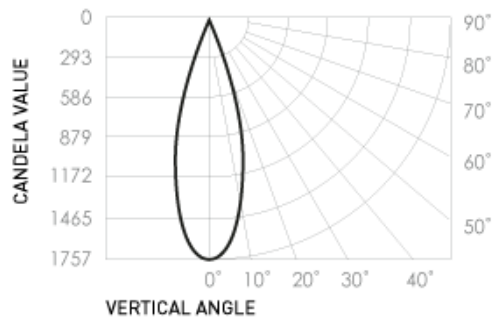


Source lumen output: 580lm
 Delivered lumen: 540lm
 Efficacy: 72lm/W
 Colour temp.: 2700K (Special Order)
 Beam angle: 36°
 CRI: 97
 Standard Deviation of colour matching (SDCM): 2MacAdams Steps

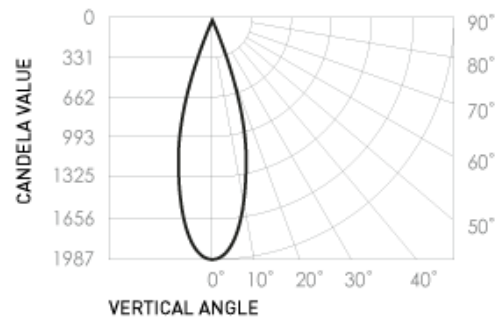


Source lumen output: 660lm
 Delivered lumen: 610lm
 Efficacy: 81lm/W
 Colour temp.: 5000K (Special Order)
 Beam angle: 36°
 CRI: 97
 Standard Deviation of colour matching (SDCM): 2MacAdams Steps

Dimensions (mm)

Front view

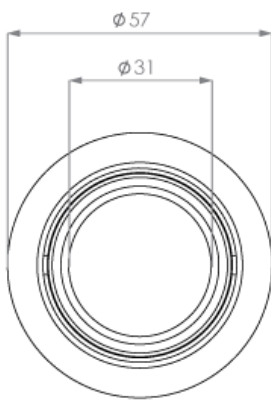

Side view

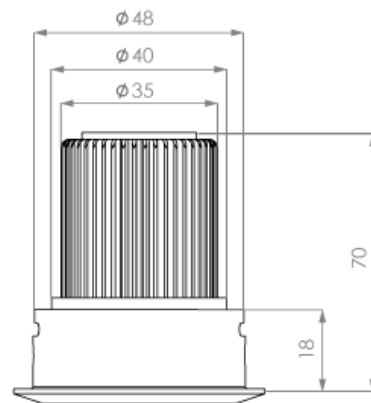

Electrical

Input voltage: 220-240V	Power usage: 7.5 W	Driver power factor: 0.9	IP rating: IP44	Surge protection: 3100V
AC Cable length: 1.5m	Dimmable: Yes	Driver: PHASE (-PHASE) DALI (-DALI) CASAMBI (-CASAMBI) 0-10V (-010V)	DC Cable Length: 0.3m	

Operational

Operating temp.: -30 to 70°C	Average temp.: 64°C	Ambient temp.: -28 to 65°C	Lifetime L70, B10: 70,000 hrs (@TA25)	Thermal rating: IC-4
Source Lumens: 590lm or 605lm or 580lm or 660lm	SDCM: 2MacAdam Steps			

Physical

Weight: 310g	Gimbal angle: ±15°	Warranty: 7 years	Version: 1.5
------------------------	------------------------------	-----------------------------	------------------------

Compatibility

Recommended Dimmers:

Compatible with leading home automation systems and dimmers.

Recommended Dimmers:

Universal, Trailing Edge, Leading Edge.

Dali option available on request


*For more details please refer to:

<https://brightgreen.com/digital-driver>

All systems are unique, please


call 1300 672 499 for advice on your installation

Installation




Step 1

Using a 50mm hole saw, cut a hole in the ceiling at the desired location.

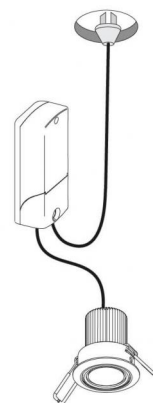


Step 2

Plug the driver into a mounted general power outlet (GPO) in the ceiling.



Step 3

Pull back the springs and insert the luminaire into the ceiling cavity. This luminaire can be covered and abutted with insulation.



Step 4

Once the light is installed, orient the luminaire using its gimbal to focus the light as required.