

T900.H Curve LED track light Datasheet




Product codes

Unit: T900.H	Series: CR	Base type: E3 H1	Colour temp.: 3K 4K	Beam angle (°): 24 38 45 55	Colour: B (Black) W (White)
------------------------	----------------------	-------------------------------	----------------------------------	--	--

Photometrics

Standard Products

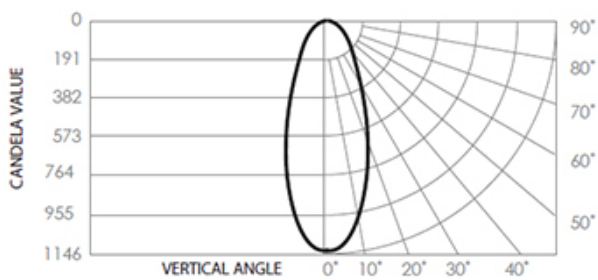

Source lumen output: 1385lm

Delivered lumen: 900lm


Efficacy: 55lm/W

Colour temp.: 3000K


Beam angle: 45°

Dimensions (mm)

Front view

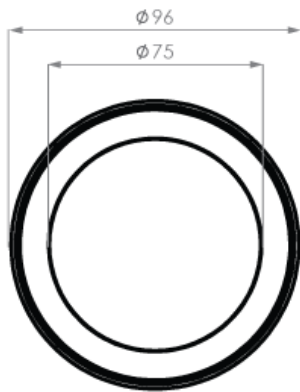

Side view



Electrical

Input voltage: 220-240V	Power usage: 16.5W	Driver power factor: >0.9	IP rating: IP44	Surge protection: 3100V
Dimmable: Yes	Driver: DRV900S:350-13			

Operational

Operating temp.: -30 to 81°C	Average temp.: 56°C	Ambient temp.: -28 to 70°C	Lifetime L70, B10: 70,000 hrs (@TA25)	Source Lumens: 1415lm or 1385lm
--	-------------------------------	--------------------------------------	---	---

Physical

Weight: 700g	Gimbal angle: 90°/360°	Warranty: 7 years	Type: H-Track or Eurotrack
------------------------	----------------------------------	-----------------------------	--------------------------------------

Compatibility

Recommended Dimmers:

"Compatible with leading home automation systems and dimmers.

Recommended Dimmers:

Universal, Trailing Edge, Leading Edge.


*For more details please refer to:

<https://brightgreen.com/digital-driver>

All systems are unique, please


call 1300 672 499 for advice on your installation."

Installation

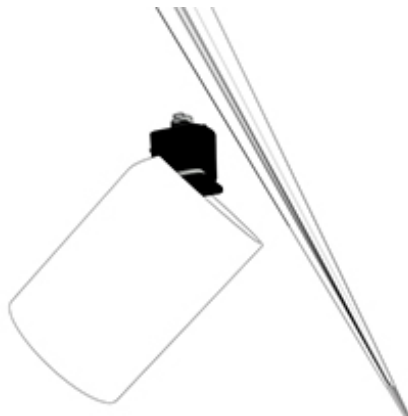

Step 1


Align the track connector with the track.

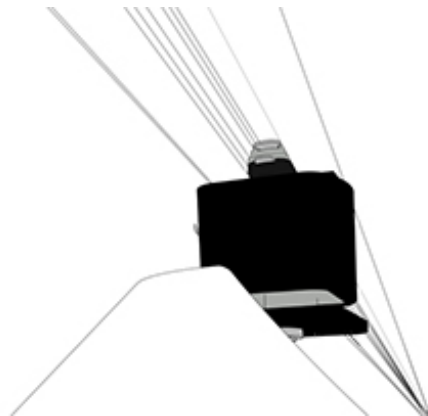

Step 2


Insert the fitting into the track channel.

Installation

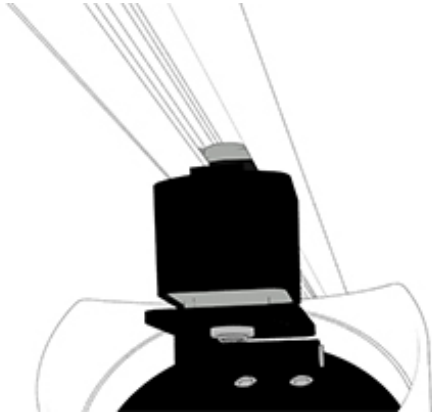

Step 3

Twist the track base in order to lock the fitting into the track channel. The direction of the twist is dependent on where the contact points are in the track.

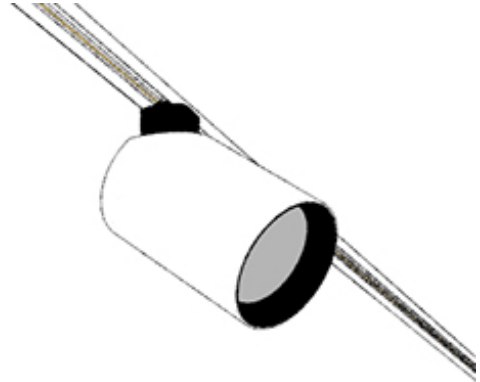

Step 4

Once the light is locked into the track, orient the luminaire to focus the light as required.