


# T2000.H Curve LED track light Datasheet



## Product codes

<b>Unit:</b> T2000.H	<b>Series:</b> CR	<b>Base type:</b> E3 H1	<b>Colour temp. (K):</b> 3K 4K	<b>Beam angle (°):</b> 55	<b>Colour:</b> B (Black) W (White)
-------------------------	----------------------	-------------------------------	--------------------------------------	------------------------------	--


## Photometrics

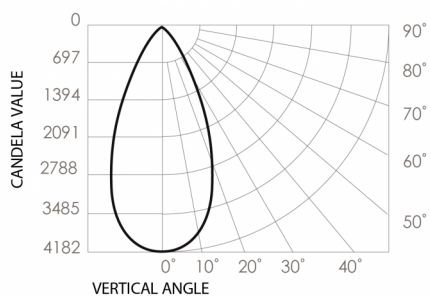


**Source lumen output:** 2099lm  
**Delivered lumen:** 2000lm  
**Efficacy:** 83lm/W  
**Colour temp.:** 3000K  
**Beam angle:** 55°

## Dimensions (mm)

Front view



Side view



## Electrical

<b>Input voltage:</b> 220-240V	<b>Power usage:</b> 24W	<b>Driver power factor:</b> >0.9 or >0.95	<b>IP rating:</b> IP44	<b>Surge protection:</b> 3100V
<b>Dimmable:</b> Yes	<b>Driver:</b> BG-024ASD-600mA			

## Operational

<b>Ambient temp.:</b> -28 to 70°C	<b>Lifetime:</b> 70,000 hrs (@TA25)	<b>Source Lumens:</b> 2099lm or 2141lm
--------------------------------------	--	---

## Physical

<b>Weight:</b> 700g	<b>Gimbal angle:</b> 90°/360°	<b>Warranty:</b> 7 years	<b>Type:</b> H-Track or Eurotrack
------------------------	----------------------------------	-----------------------------	--------------------------------------


## Compatibility

### Recommended Dimmers:


"Compatible with leading home automation systems and dimmers.  
Recommended Dimmers:  
Universal, Trailing Edge, Leading Edge.

\*For more details please refer to:  
<https://brightgreen.com/digital-driver>  
All systems are unique, please  
call 1300 672 499 for advice on your installation."

## Installation

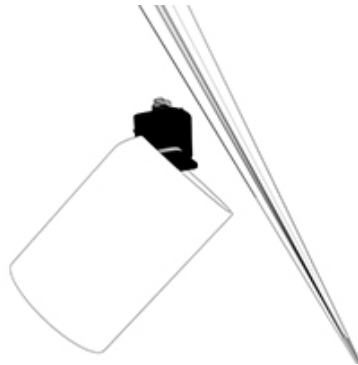


**Step 1**  
Align the track connector with the track.

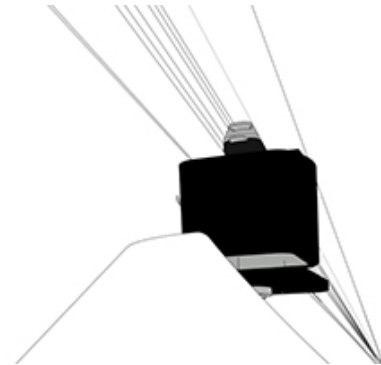

**Step 2**  
Insert the fitting into the track channel.


## Installation

---

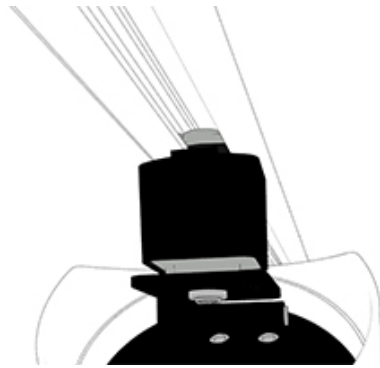

### Step 3

Twist the track base in order to lock the fitting into the track channel. The direction of the twist is dependent on where the contact points are in the track.

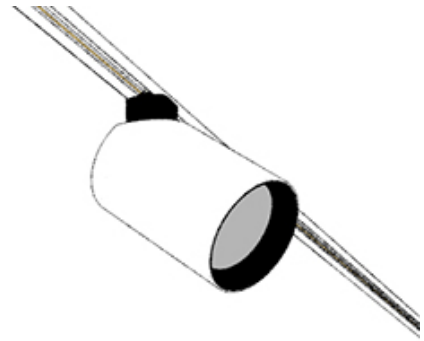

### Step 4

Once the light is locked into the track, orient the luminaire to focus the light as required.