

W900 Curve LED wall light


Datasheet



Product codes

Unit: W900	Series: CR	Colour temp. (K): 3K	Beam angle (°): 90.75	Colour: S (Silver) W (White)
----------------------	----------------------	--------------------------------	---------------------------------	---


Photometrics

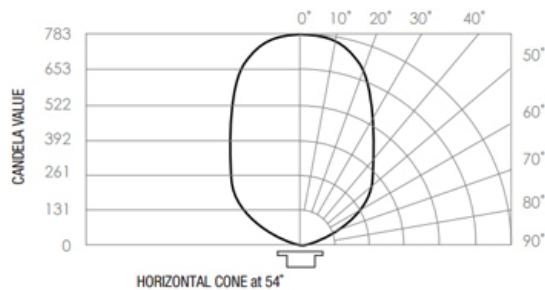


HORIZONTAL CONE at 54°
Source lumen output: 1020lm
Delivered lumen output: 900lm
Efficacy: 47lm/W
Colour temp.: 3000K
Beam angle: 90/75°

Dimensions (mm)

Front view



Side view



Electrical

Input voltage: 220-240V	Power usage: 19	Driver power factor: >0.98	IP rating: IP43	Surge protection: 3100V
Cable length: 1.5m	Dimmable: Yes	Driver: BG-DRV:A-900/20-V2		

Operational

Operating temp.: -30 to 85°C	Average temp.: 56°C	Ambient temp.: -28 to 65°C	Lifetime: 70,000 hrs (@TA25)	Source Lumens: 1020lm
--	-------------------------------	--------------------------------------	--	---------------------------------

Physical

Weight: 880g	Gimbal angle: N/A	Warranty: 7 years
------------------------	-----------------------------	-----------------------------

Compatibility

Recommended Dimmers:

"Compatible with leading home automation systems and dimmers.

Recommended Dimmers:

Universal, Trailing Edge, Leading Edge.

Dali option available on request

For more details please refer to:


<https://brightgreen.com/digital-driver>

All systems are unique, please

call 1300 672 499 for advice on your


installation."

Installation

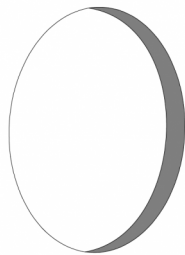

Step 1


Cut a 135mm diameter hole in the wall at the desired location.

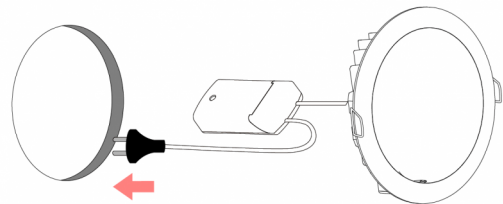

Step 2


Plug the driver into a mounted general power outlet (GPO) in the wall.

Installation



Step 3

Pull back the springs and insert the luminaire into the wall cavity. This luminaire can be covered and abutted with insulation.



Step 4

Installation complete.